



W1

One Ear Clip with stainless steel inner-ring

The use of one ear clips is an economical solution for many simple hose assemblies, as they can be used with air or other fluids.

The inner-ring means that the clamp fits snugly around the hose, while the beveled edges protect the hose from being pinched during fitting.

The use of one ear clips with inner-ring is recommended when working with delicate hoses.


* Please see pages 84 and 85 for further information regarding application tools.

* Special diameters available on request.

One Ear Clip with stainless steel inner-ring W1- A1ORB

Application Ø		Part n° W1	A	B	C	D	E	F	G	Box Quantity (MOQ)	Packing	Colour
mm min. - max.	inches min. - max.											
7,5-8,5	19/64-21/64	03011009	9,3	5,5	6,0	13,0	0,8	8,5	7,8	1000	8000	SILVER-WHITE
8,0-9,5	5/6-3/8	03011010	10,3	6,0	6,0	14,0	0,8	9,5	7,8	1000	8000	SILVER-WHITE
9,0-10,5	23/64-13/32	03011029	11,3	6,5	6,5	15,0	0,8	10,5	7,8	1000	8000	SILVER-WHITE
10,0-11,5	25/64-29/64	03011037	12,3	7,0	6,5	16,0	0,8	11,5	7,8	500	8000	SILVER-WHITE
10,5-12,5	13/32-31/64	03011045	13,3	7,5	6,5	17,0	0,9	12,5	7,8	500	8000	SILVER-WHITE
11,5-13,3	29/64-17,32	03011053	14,3	8,0	7,0	18,5	1,0	13,3	8,8	500	4000	SILVER-WHITE
13,0-15,3	33/64-39/64	03011061	16,3	8,5	7,0	20,5	1,1	15,3	8,8	500	4000	SILVER-WHITE
15,0-17,3	19/32-11/16	03011070	18,5	9,5	7,0	23,0	1,1	17,3	8,8	500	4000	SILVER-WHITE

W1 Band: St4 steel (DIN1624) **Inner-ring:** Stainless steel (AISI-301) **Finish:** Silver-white Cr3 Zinc-Plated

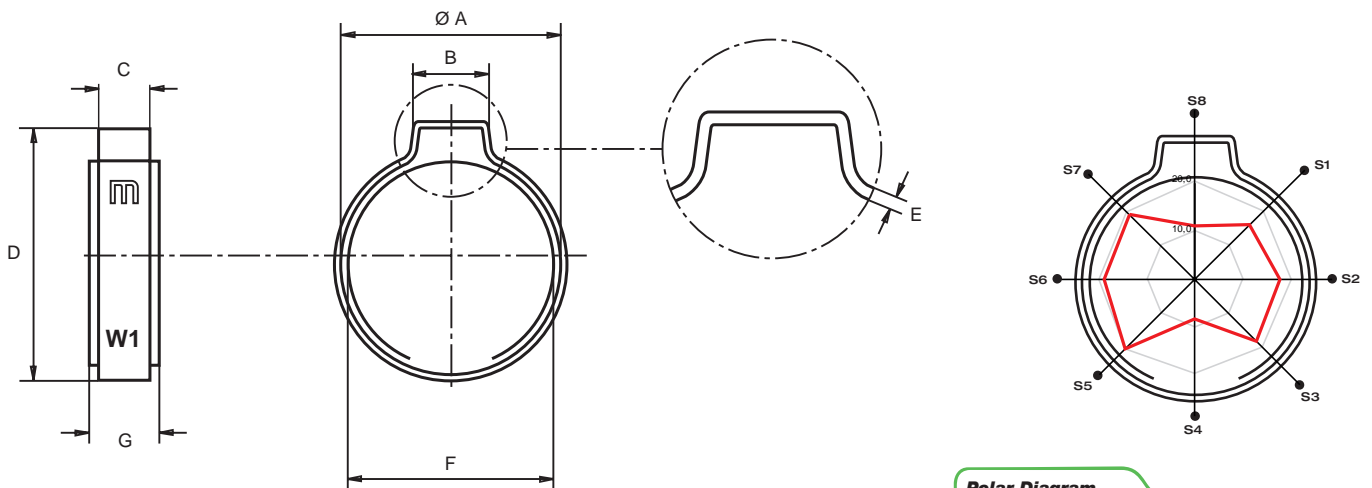

Polar Diagram

● Sectors	S1	S2	S3	S4	S5	S6	S7	S8
— Force Kg	16,1	17,8	18,1	8,2	20,4	18,8	19,8	11,2

Torque / Efficiency [Nm / daN]